




STOREFRONT SYSTEM

2" X 4 1/2" FOR 1" GLAZING

FEATURES

- Sightline 2" for 1" glazing infill
- EPDM glazing gaskets
- Ladder assembly for transportation to job site for quicker installation
- Heavy duty mullions and/or steel reinforcement to meet high wind load requirements

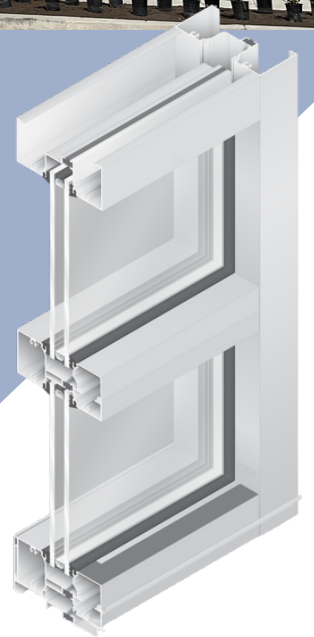

STOREFRONT SYSTEMS: THERMAL MODELLING RESULTS

Dual Glazed Low-e Coating	Center of Glass U-Factor (W/m2·K)	Overall U-Factor (W/m2·K)	Overall U-Factor (Btu/h·ft2·°F)	SHGC	VT
Solarban60 Low-e	1.39	2.04	0.36	0.36	0.62
Solarban60 on EnergyAdvantage Low-e surface 4	1.13	1.87	0.33	0.33	0.57