


2000 SERIES 2" CURTAINWALL

FEATURES

- 2" frame width
- 4" backsection (6" overall depth)
- Outside glazed captured curtainwall
- 1" infill (dual glazed)
- Concealed shear block joinery
- Continuous gasket thermal break
- Designed to integrate with door and vent systems
- Aluminum Alloy 6063 T5 temper
- Pressure-equalized rainscreen system
- Injection molded corner block to control water infiltration
- Steel reinforced mullions available
- Extended cap/sunshade available

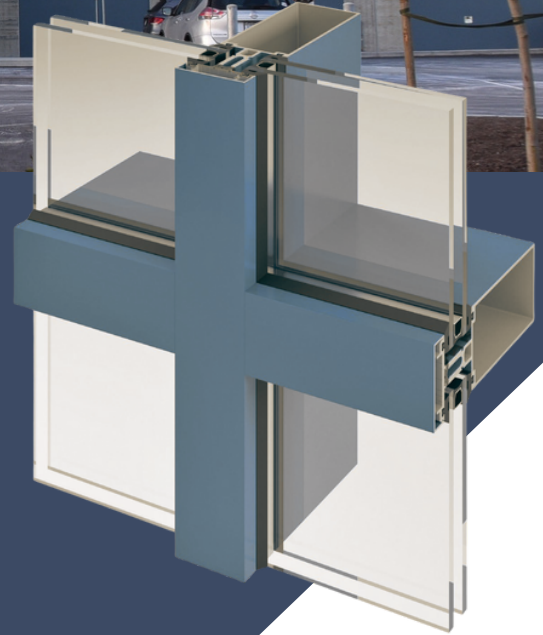

2000 SERIES: THERMAL MODELLING RESULTS

| Dual Glazed Low-e Coating | Center of Glass U-Factor (W/m ² ·K) | Overall U-Factor (W/m ² ·K) | Overall U-Factor (Btu/h·ft ² ·°F) | SHGC | VT |
|---|--|--|--|------|------|
| Solarban60 Low-e | 1.39 | 2.25 | 0.40 | 0.37 | 0.64 |
| Solarban60 on EnergyAdvantage Low-e surface 4 | 1.13 | 2.02 | 0.36 | 0.35 | 0.60 |