



3000 THERMAL SERIES 2 1/2" CURTAINWALL

FEATURES

- 2 1/2" frame width
- 5 1/8" or 8" back sections
- Outside glazed curtain wall
- Captured, 2 sided SSG, and 4 sided SSG configuration
- 1" infill (dual glazed) and 1 3/4" (triple glazed) compatible
- Concealed shear block joinery
- Excellent thermal performance with polyamide thermal strut
- Designed to integrate with door and vent systems
- Aluminum alloy 6063 T6 temper
- Pressure-equalized rainscreen system
- Steel reinforced mullions available
- Extended cap/sunshade available

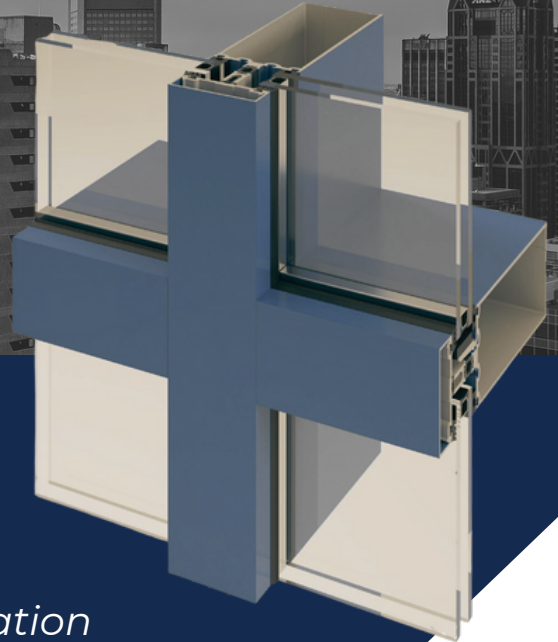

3000 SERIES: THERMAL MODELLING RESULTS

Dual Glazed Low-e Coating	Center of Glass U-Factor (W/m ² ·K)	Overall U-Factor (W/m ² ·K)	Overall U-Factor (Btu/h·ft ² ·°F)	SHGC	VT
Solarban60 Low-e	1.39	1.82	0.32	0.36	0.63
Solarban60 on EnergyAdvantage Low-e surface 4	1.13	1.59	0.28	0.39	0.59